


CMC 353

Compact and Versatile Three-Phase Relay Testing Solution

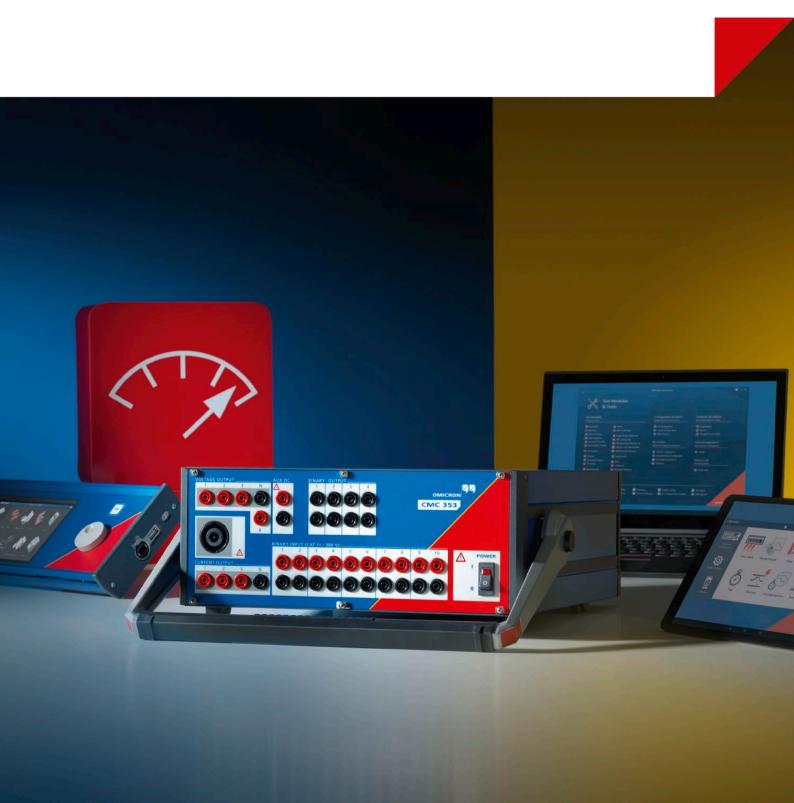

Compact and versatile relay testing


With its compact design and low weight of 13.3 kg / 29.3 lbs, the CMC 353 provides the perfect combination of portability and power. It is the ideal test set for three-phase protection testing and the commissioning of SCADA systems. The powerful current outputs (3 x 32 A / 430 VA) optimally support 5 A relay testing.

The portable design makes this device an excellent choice for commissioning and maintenance tasks, particularly in industry, distributed generation, medium and low voltage applications. It meets a wide variety of challenges in protection engineering from testing electromechanical relays to the latest IEC 61850 IEDs.

Safe and future-proof

The three current and four voltage output channels of the CMC 353 are continuously and independently adjustable in amplitude, phase and frequency. All outputs are protected against over-temperature, accidental short-circuits, external high-voltage transient signals and are monitored in case of overload.

The integrated network interface supports comprehensive testing in IEC 61850 environments using optional GOOSE simulation and subscription as well as Sampled Values simulation functionality. It is also possible to retrieve, evaluate and log the IED Client/Server SCADA communication according to IEC 61850.

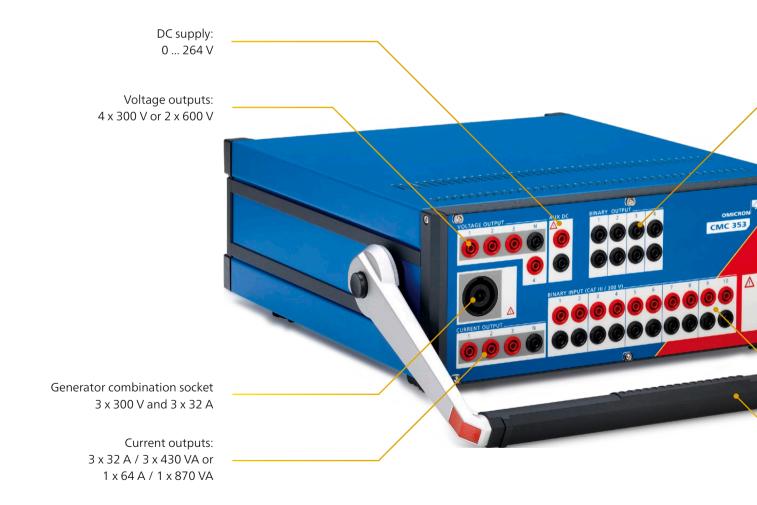



Varied applications

Up to 12 independent channels of low-level signals are available on the rear of the test set, which can be used to test relays with non-conventional sensor inputs (for example, Rogowski coils) or to control external amplifier units.

Time synchronized applications according to IEEE 1588 are possible, for example, via CMGPS 588. The GPS controlled time reference with integrated antenna works as a Precision Time Protocol (PTP) grandmaster clock and is optimized for outdoor usage.

Connectivity options

The CMC 353 is designed to work with OMICRON's most powerful software tools. Users can control the test set using either a Windows PC/laptop or an Windows tablet and connect via Ethernet/USB cable or Wi-Fi (through the optional mini wireless USB adapter).

Organize your tests

For centralized planning, tracking and managing of all engineering, testing and maintenance activities in the power industry, the ADMO software¹ ensures that the workflows of asset and operations managers, testers, and protection engineers are structured and coordinated. Key data will be kept up-to-date and available to all employees at all times.



Your benefits

- > Compact and lightweight design providing a high degree of portability
- > High current amplitudes for 5 A relay testing
- > High accuracy and versatility for testing digital and static relays of all types
- Integrated network interface for testing IEC 61850 IEDs

www.omicronenergy.com/CMC353

Control options tailored to your needs





"Ideal solution for ..."

Manual settings-based testing with CMControl



CMControl P is the entry-level CMC operation platform specifically designed for easy manual settings-based testing of protection and measurement devices.

- > Simple and fast testing with intuitive user guidance
- > Reduced testing efforts, increased productivity
- > No special training required

www.omicronenergy.com/cmcontrol

"... fast and easy manual testing with low initial effort"

Advanced settings-based testing with Test Universe



Test Universe is made for advanced testing and offers a wide range of application-optimized test modules. Customized templates allow users to achieve a high degree of automation and standardization.

- > Fully automated settings-based protection testing
- > Flexible test plans
- > Function specific modules

www.omicronenergy.com/testuniverse

"... frequent and recurring testing, a wide application range and greater depth of testing"

Innovative system-based testing with RelaySimTest



The innovative system-based testing approach of **RelaySimTest** allows the verification of the whole protection system with a higher testing quality than ever before.

- > Logic and scheme testing with outstanding troubleshooting capabilities
- > Supports easy end-to-end testing
- > Independent of relay type and settings

www.omicronenergy.com/relaysimtest

"... logic testing, scheme testing and troubleshooting tasks"



Achieve the highest level of system reliability **using a combination** of settings-based and system-based testing.







Use the full potential of your CMC with ...



... Protection Testing Library (PTL)

The PTL provides predefined test templates for more than 500 protection relays from various manufacturers. The templates can be adapted and extended. Studies have shown that utilizing fully automated templates **can reduce testing time by up to 70%** compared to manual testing.

- > Saves time and effort compared to manual creation of test plans
- > Manual or automatic transfer of relay settings directly from the relay manufacturer's software
- > Test templates and relay parameter converters (XRIO) customizable for individual requirements

www.omicronenergy.com/ptl







... IEC 61850 testing modules

The IEC 61850 modules enable protection testing to be carried out in the same way as with conventional binary and analog signals using GOOSE, Sampled Values and Client/Server communication.

- > Publishing and Subscribing GOOSE messages
- > Publishing Sampled Values streams
- > Protection Testing with accessing the Data Model and Client/Server communication (SCADA)

www.omicronenergy.com/puc

Testing software packages and add-ons

A wide range of testing software is available consisting of Test Universe modules and additional tools. We have bundled typical testing requirements into useful software packages, but each package can of course be adapted to individual needs.

	offers a good introduction with basic functions and modules; can serve as a base for custom compiled packages		Pa	ckag	es	
	Standard	contains all modules that are typically used for settings-based testing of protection devices				
	Enhanced		pecifically extended by functions for system-based testing and transient rell as for free programming	Essential	Standard	Enhanced
	OMICRON Control Center ¹ Automation tool, document-oriented test plan, template and report form		Automation tool, document-oriented test plan, template and report form			
	QuickCMC		Convenient manual testing in the Test Universe environment			
	State Sequencer		Determining operating times and logical timing relations by state-based sequences			
	Harmonics		Generation of signals with superimposed harmonics			
	CB Configuration		Module for setting the CB simulation			
	Ramping		Determining magnitude, phase, and frequency thresholds by ramping definitions			
	TransPlay		Playback of Comtrade files, recording of binary input status			
S	Advanced Tra	insPlay	Playback of Comtrade files, recording of binary input status, processing options and automatic assessment			
dule	Pulse Ramping		Determining magnitude, phase, and frequency thresholds by ramping definitions			
noc	Overcurrent ²		Automatic testing of positive/negative/zero sequence overcurrent characteristics			
Test Universe modules	Distance		Impedance element evaluations using single-shot definitions in the Z-plane			
ver	Advanced Distance		Impedance element evaluations using automatic testing modes			
Uni	VI Starting		Testing of the voltage dependent overcurrent starting function of distance relays			
est	Autoreclosure		Testing of the autoreclosure function with integral fault model			
Ĕ	Advanced Differential ³		Comprehensive three-phase differential relay testing (four modules)			
	Annunciation Checker		Verification of the correct marshalling and wiring of protection devices			
	Power		Testing with visualization and assessment in the P-Q plane (basic)			
	Advanced Power		Testing with visualization and assessment in the P-Q plane (enhanced)			
	Transient Ground Fault ⁴		Simulation of ground-faults in isolated or compensated networks			
	Synchronizer		Automatic testing of synchronizing devices and synchro-check relays			
	Meter		Testing of single and multifunction energy meters			
	PQ Signal Generator		Simulation of power quality phenomena according to IEC 61000-4-30 and IEC 62586			
20	IEC 61850 Cli	ent/Server	Automatic SCADA testing in accordance with IEC 61850			
61850	GOOSE Confi	guration	Testing with GOOSE according to IEC 61850			
IEC 6	Sampled Valu	ies Configuration	Testing with Sampled Values according to IEC 61850-9-2 ("9-2 LE") and IEC 61869-9			
<u> </u>	IEDScout		Universal software tool for working with IEC 61850 IEDs			
	CMControl P App		Quick and easy manual testing of protection and measurement devices			
sools	RelaySimTest ⁴		System-based protection testing by simulating realistic power system events			
<u>=</u>	Adv. Transformer Features		Advanced transformer features for differential protection			
ons	Motor Feat	ures	Motor features for asynchronous motor simulation			
Additional tools	CMEngine	MEngine Programming interface for controlling CMC test sets with user specific software				
Ad	TransView Transient signal analysis for COMTRAD		Transient signal analysis for COMTRADE files			
Q	ADMO light ⁵		Asset and maintenance management for protection systems			

Contained in all packages: OCC Batch, AuxDC Configuration, ISIO Connect (for ISIO 200), Polarity Checker (for CPOL3).

Contained

□ Optionally available

¹ Includes licenses for Pause Module, ExeCute, TextView

² Includes license for Overcurrent Characteristics Grabber

³ Includes Single-Phase Differential

⁴ RelaySimTest license also includes the licenses for Transient Ground Fault and NetSim

⁵ ADMO light is limited to 50 assets but can be upgraded to a full ADMO version at any time



CMC 353 accessories

The following accessories are included with the CMC 353 standard delivery but can also be ordered separately.

	Description	Item no.
	> Country-specific power cord 3 m / 10 ft	
7074	> Ethernet patch cable 1.5 m / 5 ft	E1664300
Ownerson	> Ethernet patch cable 3 m / 10 ft	E1664400
	> USB connection cable 2 m / 6.6 ft	B1021101
	> Leads with 4 mm safety plugs (6 x red, 6 x black) 2 m / 6.6 ft	P0006168
	> Flexible terminal adapters (12 x black)	E0439201
	> Flexible test lead adapters with retractable sleeve (6 x red, 6 x black)	P0006167
	> Grounding cable with battery clamp and M6 cable lug 6 m / 20 ft	B0349701
	> Soft bag	E0659401

Optional accessories¹

	Description	Item no.
	CMC wiring accessory package For connecting test objects to CMC test sets, consisting of:	P0010657
	 12 flexible test lead adapters for connections to narrow terminals 12 flexible test lead adapters with retractable sleeve for connections to non-safety sockets 8 flexible jumpers for paralleling current outputs or shorting neutrals of binary inputs 8 crocodile clips for contacting pins or screw bolts 12 flexible terminal adapters for screw-type terminals 12 solid terminal adapters for screw-type terminals 20 cable lug adapters for M4 (0.15 in) screws 10 cable lug adapters for M5 (0.2 in) screws 1 test lead to ground test objects, e.g. in a lab environment 10 cable ties 150 mm / 6 in long 1 accessory bag 	
	Mini wireless USB adapter For wireless control of the CMC 353. ²	E1636800
	Generator combination cable Connection between the generator combination plug of the CMC 353 to the test object.	B1328100
chalencal	Transport case Heavy-duty transport case with wheels and extendable handle.	B0679500
P	CMGPS 588 GPS controlled time reference with integrated antenna. It is optimized for outdoor usage and works as a PTP grandmaster clock according to IEEE 1588-2008, IEEE C37.238 (Power Profile), IEC 61850-9-3 (Utility Profile).	P0006433
	CMLIB REF 6xx Interface adapter for testing ABB protection relays for example, ABB REF615 with Rogowski inputs. ³	P0006379
	CPOL3 polarity and wiring checker For checking a series of terminals for correct wiring. The signal can be injected into the primary side of a CT. Thus, the correct polarity of CT wiring can be included in the test.	P0009398

¹ Non-exhaustive list. For the complete list please visit our website: www.omicronenergy.com/cmc353

² Requires a CMC test set with NET-2 interface board.

Wi-Fi is subjected to technical and legal constraints. For more information please contact your local OMICRON office or sales partner.


³ More interface adapters for other relays with sensor inputs are also available

Overview of technical specifications¹

CMC 353

Current amplifier

Setting range	3-phase AC (L-N) 1-phase AC (L-L) 1-phase AC (LL-LN) DC (LL-LN)	3 x 0 32 A 1 x 0 32 A 1 x 0 64 A 1 x 0 ±90 A
Power	3-phase AC (L-N)	3 x 430 VA typ. at 25 A 3 x 250 W guar. at 20 A
	1-phase AC (L-L)	1 x 870 VA typ. at 25 A 1 x 530 W guar. at 20 A
	1-phase AC (LL-LN)	1 x 500 VA typ. at 40 A 1 x 350 W guar. at 40 A



Accuracy	Error $< 0.05 \% \text{ rd.}^2 + 0.02 \% \text{ rg.}^2 \text{ typ.}$
	Error < 0.15 % rd. + 0.05 % rg. guar.
Distortion (THD+N) ³	< 0.05 % typ., < 0.15 % guar.
Resolution	1 mA
Max. compliance voltage	35 Vpk / 70 Vpk
(L-N)/(L-L)	

Amplifiers, general


Frequency	Range sine signals ⁴	10 1000 Hz
	Range harmonics / interharmonics	Voltage: 10 3000 Hz ⁵ Current: 10 1000 Hz
	Range transient signals	DC 3.1 kHz ⁵
	Resolution	< 5 μHz
Phase	Resolution	0.001°
	Error at 50 / 60 Hz	Voltage: 0.02° typ., < 0.1° guar. Current: 0.05° typ., < 0.2° guar.
Bandwidth (-3 dB)		3.1 kHz

1 The full technical specifications are available on request. All data specified are guaranteed, except where indicated otherwise. OMICRON guarantees the specified data for one year after factory calibration, within 23 °C ± 5 °C / 73 °F ± 10 °F in the frequency range from 10 to 100 Hz and after a warm-up phase > 25 minutes

- rd. = reading, rg. = range
- ³ THD+N: Values at 50/60 Hz, 20 kHz measurement bandwidth
- ⁴ For current outputs amplitude derating at > 380 Hz
- 5 Amplitude derating at > 1000 Hz

Voltage amplifier

Setting range	4-phase AC (L-N) 2-phase AC (L-L) DC (L-N)	4 x 0 300 V 2 x 0 600 V 4 x 0 ±300 V
Power	4-phase AC (L-N)	4 x 75 VA typ. at 100 300 V
		4 x 50 VA guar. at 85 300 V
	3-phase AC (L-N)	3 x 100 VA typ. at 100 300 V
		3 x 85 VA guar. at 85 300 V
	1-phase AC (L-L)	1 x 275 VA typ. at 200 600 V
		1 x 250 VA guar. at 200 600 V



Accuracy (at 0 300 V)	Error < 0.03 % rd. ² + 0.01 % rg. ² typ. Error < 0.08 % rd. + 0.02 % rg. guar.
Distortion (THD+N) ³	0.015 % typ., < 0.05 % guar.
Resolution	5 mV / 10 mV in range 150 V / 300 V
Ranges	150 V / 300 V

Low level outputs

Number of outputs	6 (12 with Option LLO-2)	
Setting range	0 ±10 Vpk	

Auxiliary DC supply

Voltage ranges, max. current	0 264 VDC, 0.2 A
	0 132 VDC, 0.4 A
	0 66 VDC, 0.8 A

Binary inputs

Number	10 (5 potential groups)
Trigger criteria	Toggling of potential-free contacts or DC voltage compared to threshold voltage
Ranges	20 V / 300 V
Sample rate	10 kHz (resolution 100 μs)

Binary outputs

Туре	4 relay 4 transistor
Relay breaking capacity	Imax: 8 A / Pmax: 2000 VA at 300 VAC Imax: 8 A / Pmax: 50 W at 300 VDC





IEC 61850¹

Publishing	
GOOSE	360 virtual binary outputs,
	128 GOOSEs
Sampled Values	IEC 61850-9-2 ("9-2LE"), IEC 61869-9
Subscribing	
GOOSE	360 virtual binary inputs, 128 GOOSEs
Maximum number of streams	
Publishing	RelaySimTest: 4, Test Universe: 3
	(1 stream: 4 V + 4 I)

Time synchronization

Interna	system	C	loc	k
---------	--------	---	-----	---

· · · · · · · · · · · · · · · · · · ·	
Frequency drift	< 0.37 ppm / 24 h < 4.6 ppm / 20 years
CMC 353s to external reference	
Absolute timing accuracy (voltage/current)	< 1 μs typ., < 5 μs guar.
To external voltage	Reference signal on binary input 10: 10 300 V / 15 70 Hz
Precision Time Protocol (PTP)	IEEE 1588-2008 IEEE C37.238 (Power Profile) IEC 61850-9-3 (Utility Profile)
CMC 353 to test objects	
IRIG-B, PPS, PPX	Via CMIRIG-B, TICRO 100

Power supply

Nominal input voltage 100	240 VAC, 1-phase (50/60 Hz)
---------------------------	-----------------------------

Environmental conditions

Operation temperature ²	0 +50 °C / +32 +122 °F
Storage temperature	-25 +70 °C / -13 +158 °F
Humidity range	Relative humidity 5 95 %, non-condensing

Equipment reliability

Electromagnetic interference (EMI)

Electromagnetic interiere	rice (EIVII)
International / Europe	IEC/EN 61326-1, IEC/EN 61000-6-4,
	IEC/EN 61000-3-2/3,
	CISPR 32 (Class A)/EN 55032 (Class A)
North America	47 CFR 15 Subpart B (Class A) of FCC
Electromagnetic susceptib	pility (EMS)
International / Europe	IEC/EN 61326-1, IEC/EN 61000-6-2/5,
	IEC/EN 61000-4-2/3/4/5/6/8/11/16/18
Safety	
International / Europe	IEC/EN 61010-1, IEC/EN 61010-2-030
North America	UL 61010-1, UL 61010-2-030,
	CAN/CSA-C22.2 No. 61010-1,
	CAN/CSA-C22.2 No. 61010-2-030
Mechanical tests	
Vibration	IEC 60068-2-6
Shock	IEC 60068-2-27

Miscellaneous

Weight	13.3 kg / 29.3 lbs
Dimensions (W x H x D, without handle)	343 x 145 x 390 mm / 13.5 x 5.7 x 15.4 in
PC connection	2 PoE (Power over Ethernet) ports USB Type-B port (PC) USB Type-A port (optional Wi-Fi adapter for wireless control)

Certifications

Developed and manufactured under an ISO 9001 registered system



The GOOSE and Sampled Values functionality require software licences for the respective configuration modules
 For an operational temperature above +30 °C /+86 °F a duty cycle of down to 50 % may apply

We create customer value through ...

— Quality ——

You can rely on the highest safety and security standards



Superior reliability with up to

72

% | 1 ***

hours burn-in tests before delivery

100%

routine testing for all test set components



ISO 9001 TÜV & EMAS ISO 14001 OHSAS 18001



Compliance with international standards

— Innovation ——



... a product portfolio tailored to my needs

More than

200

developers

keep our solutions up-to-date

More than

15%



of our annual sales is reinvested in research and development

Save up to

80%



testing time through templates, and automation




— Support ——

247

Professional technical support at any time



Loaner devices help to reduce downtime



Cost-effective and straight-forward repair and calibration



offices worldwide for local contact and support

— Knowledge ——

More than

300



Academy and numerous hands-on trainings per year

Frequently OMICRON hosted user meetings, seminars and conferences








to thousands of technical papers and application notes





Extensive expertise in consulting, testing and diagnostics

OMICRON is an international company that works passionately on ideas for making electric power systems safe and reliable. Our pioneering solutions are designed to meet our industry's current and future challenges. We always go the extra mile to empower our customers: we react to their needs, provide extraordinary local support, and share our expertise.

Within the OMICRON group, we research and develop innovative technologies for all fields in electric power systems. When it comes to electrical testing for medium- and high-voltage equipment, protection testing, digital substation testing solutions, and cybersecurity solutions, customers all over the world trust in the accuracy, speed, and quality of our user-friendly solutions.

Founded in 1984, OMICRON draws on their decades of profound expertise in the field of electric power engineering. A dedicated team of more than 1250 employees provides solutions with 24/7 support at 22 locations worldwide and serves customers in more than 170 countries.

The following publications provide further information on the solutions described in this brochure:





Product catalog

RelaySimTest

For more information, additional literature, and detailed contact information of our worldwide offices please visit our website.